








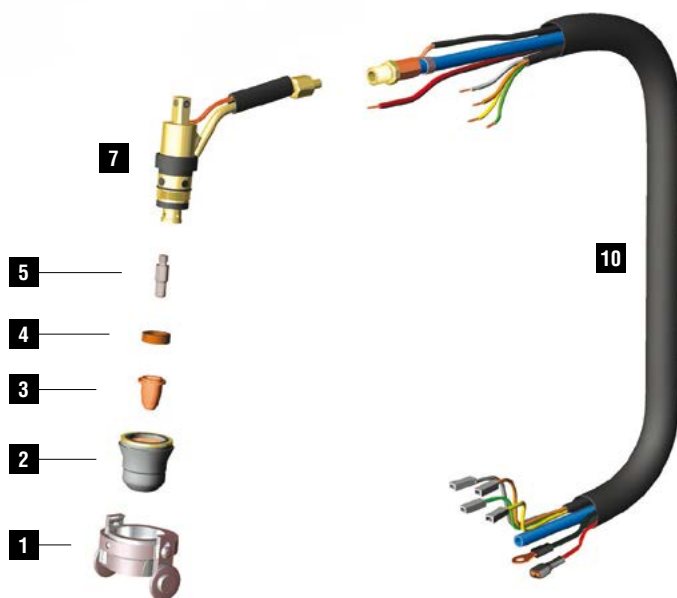
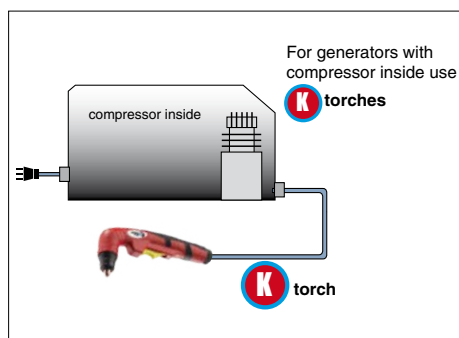
# ERGOCUT S 35K

CE EN60974-7



CODE	↔		
PAS104M-096-BB3	4 m	12.5'	 DIRECT 4 WIRES

TECHNICAL DATA		
 <b>NO HF</b>	<b>ERGOCUT S 35K</b>	
 1 m	0,4 kg	0.88 lb
<b>V PEAK</b>	500	
	2.5 bar	
	60 l/min	
<b>X 35%</b>	32A	
	6-8 mm	1/4"-5/16"



	CODE		Description	Ø		↔		CONTACT		DRAG		GOUGING	REF			
1	CV0024		stand off guide	23,5 mm		33 mm									1	
2	PC0135		nozzle (2 rings)			28 mm									4	
3	PD0103-09		40 A	0,9 mm	.035"	25,8 mm								-	10	
3	PD0103-65		20 A	0,65 mm	.025"	25,8 mm									-	10
3	PD0116-06		20 A	0,6 mm	.023"	17,3 mm									-	10
3	PD0116-08		30 A	0,8 mm	.030"	17,3 mm									-	10
3	PD0116-09		40 A	0,9 mm	.035"	17,3 mm									-	10
4	PE0106		Swirl ring			4,6 mm							60028		2	
5	PR0106		electrode			30,5 mm									10	
5	PR0110		electrode			21,8 mm									10	

	CODE		Description	
7	EA0330		o-ring	10
7	PF0127		Ergocut S25K-S35K-S25-S45	1
8	TP0400		trigger kit	1

	CODE		Description	
9	TP0401		handle kit	1
10	PH4015		cable assembly - 4 m / 12' - direct 4 wires	1

STANDARD

CONTACT SHORT CONTACT LONG DRAG SHORT DRAG LONG GOUGING